

# Easyfit Double Glazing

Easyfit double glazing comprises a flexible PVC edging strip which should be placed neatly around your new cut to size window pane. It should be held in position by nylon clips and wood screws. Use the mitre gauge to help cut neat accurate corners.

The Easyfit pane can be fitted either to the opening window lights to allow ventilation and use of the windows or to the main frame for maximum insulation and draught proofing. When the use of windows is required, we suggest the pane is fitted externally. Where possible, allow the secondary pane to overlap the frame by 10mm on each edge.

## Helpful Hints


The edging strip is always easier to work with when it's warm. We suggest placing it in the airing cupboard or similar place the night before use. When placing edging strip onto glass DO NOT run finger down the back of the edging strip to apply it quickly - work a few cms at a time.

## Tools Required

Screwdriver, craft knife or similar, ball point pen and tape measure.

## Step by Step Fitting Guide

1. Place a mark of the edging strip 5cm from a neat squarely cut end
2. Lay the edging strip in the channel of the Easyfit mitre gauge so the mark on the edging strip is in the centre of the middle 'V'. Holding the strip firmly in the two finger grips, cut down each side of the 'V' with the sharp knife, being careful not to cut right through the strip.

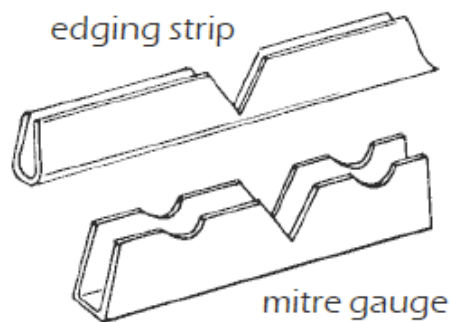

3. Now carefully fit the edging strip on the glass. The cut out should mould easily around the first corner. Continue along this edge to the next corner and place a mark with the pen on the edging strip where the glass finishes. This point marks the position of the next corner.
4. Repeat steps 2 and 3 until the edging strip is fitted around the pane.
5. You will need a clip about 5cm from each corner on each side, the clips spaced equally about 20-25cm along the remaining distance.
6. Position the pane carefully so there is an equal overlap on the frame on all four sides
7. Fix the two clips on the bottom edge 5cm from the corners - these will hold the weight of the pane
8. Make sure the pane is clean and the window perfectly dry before resting the pane on the bottom fixing clips. Fix two clips on the top edge, making sure that one of these first four clips covers the join in the edging strip.
9. Now complete the window by fixing the rest of the clips as suggested above.

Note - it is always best to remove double glazing in summer to allow ventilation.