




Magnetglaze System

a magnetic fixing system

Magnetglaze is a popular and easy to use system. It comprises two 13mm wide strips, one metal and the other magnetic. The metal strip is white faced and has self-adhesive tape on one side. This strip is placed on the window frame around the area to be glazed. The magnetic strip, which is also self-adhesive is placed around the edges of the plastic sheet.

For larger, draughtier windows we recommend the Magnetglaze Extreme system with 25mm wide magnet and steel strips for a significantly better grip.

Magnetglaze is intended for internal use only and NOT recommended for use with glass. Always fit to the main frame and not to opening windows.

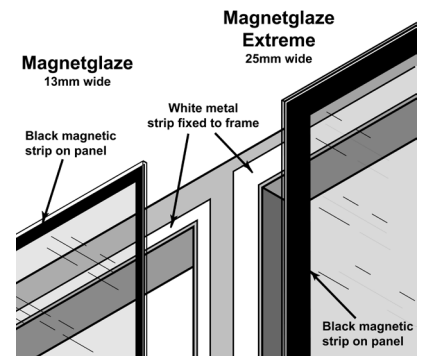

ADD-ONS AVAILABLE

- hide the glazing sheet edges and the magnetic strip with attractive Magnetglaze Finishing Trim: a 20mm wide self-adhesive white strip that is easy to mitre and install for a professional finish.

HELPFUL HINTS

- For larger windows (1200mm x 1200mm or bigger) we strongly recommend placing a couple of screws under the glazing panel to support the sheet. This will remove the risk of the sheet slipping down and becoming detached. Alternatively, consider using new Magnetglaze Extreme.

TOOLS REQUIRED - Tape measure, pencil and a strong pair of scissors.



Measuring up for your Plastic Sheet

1. Measure the window and any frame up to the point where the inside edge of the steel strip will be placed on the window surround. This will give you a vertical and a horizontal measurement. Ensure you have a minimum of 20mm mounting surface all the way round your existing window to fit the steel tape.
2. Add 25mm to each measurement. This will give you the size of the sheet you need to purchase.

Measuring up for your Magnetglaze Tape

1. You will require enough magnetic tape to go round the entire edge of your acrylic panel.

USING MAGNETGLAZE STEP BY STEP

CAUTION - Care must be taken when handling the steel strip as the edges and trimmed corners can be sharp. This can cause paper cut injuries if not handled with a little care.

1. Clean and degrease the window surround using the Surface Preparation wipe enclosed in your kit
2. Remove strips from packaging and begin by cutting and sticking the black magnetic strip to each edge of the plastic sheet.
3. Now hold the panel up to your window frame so that it overlaps equally on each edge.
4. Draw a pencil line around the sheet onto the window frame
5. Cut and fit the white metal strip to the window frame, sticking it just inside the pencil marks.
6. Offer up the glazing panel to the window and click into place.
7. It is possible to paint over the steel strip in order to match your window decor. This will not reduce the magnetic grip but will improve the look of the window when the panel is removed.



It is always best to remove double glazing in summer to allow ventilation.

PLEASE READ INSTRUCTIONS THOROUGHLY BEFORE CUTTING OR FITTING ANY SYSTEM

Distributed by The Plastic People, 221 Pontefract Lane, Leeds. LS9 0DX